

HIGH QUALITY DENSE ENCODER MODULATION SYSTEM




PICO DIGITAL™

FEATURES

- Platform based encoder with up to four field hardware upgradeable dual channel encoder modules
- Software upgradeable for future proof feature upgrades
- Supports 480i to 1080p real time encoding and up to 8 HD video channels in MPEG-2 or H.264 formats in 1RU
- MPEG Audio Encoding plus optional Dolby® Digital Stereo Creator
- Output resolution same as input resolution
- Inputs per dual encoder module - component, HDMI (clear) and composite/closed caption
- Integrated support for Emergency Alert System (EAS)
- Automatic detection of input type and format
- Outputs four consecutive QAM channels
- IP output – Unicast/Multicast, UDP/IP, SPTS
- Simultaneous QAM/IP Output
- PSIP tables allow user to configure virtual channel map for each channel
- High output with 60 db Max. pre-combined
- Secure management and configuration via easy to use web browser
- External DC backup power supply



APPLICATIONS

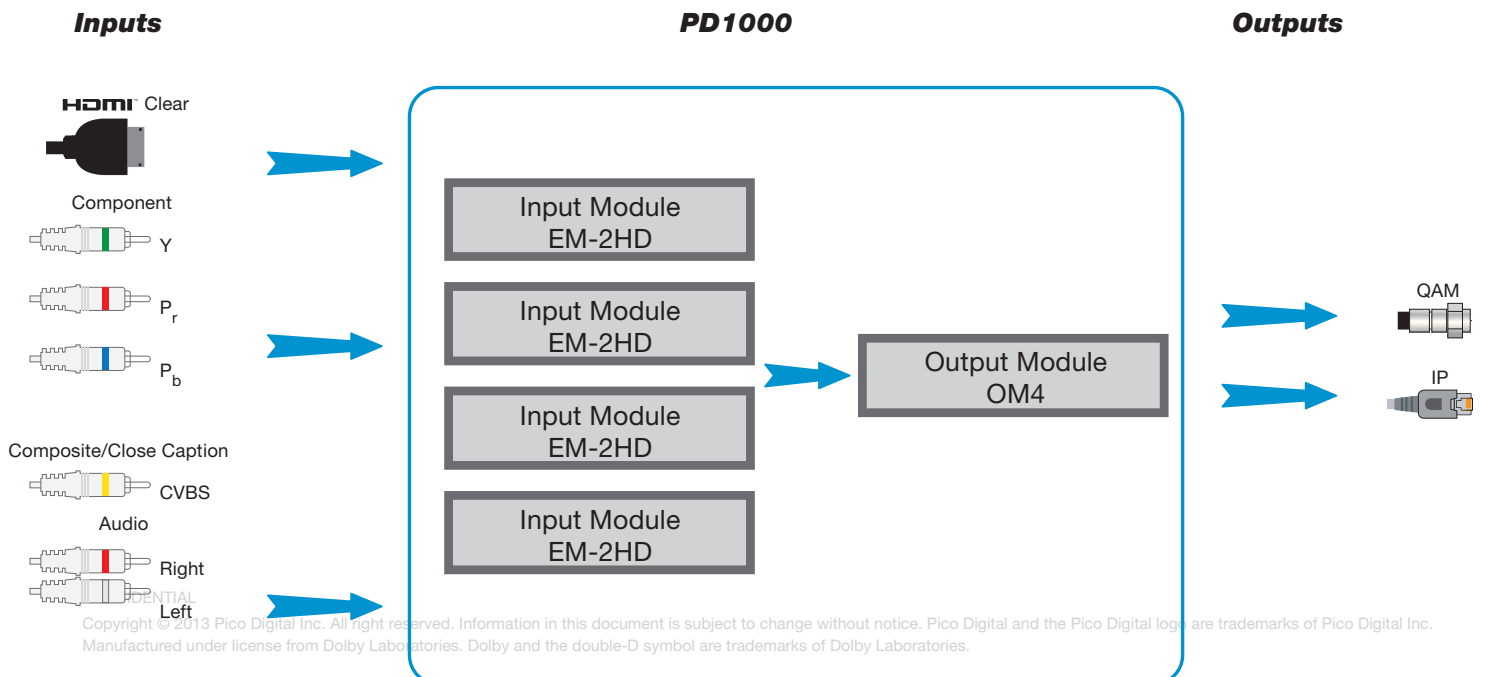

Copyright © 2013 Pico Digital Inc. All right reserved. Information in this document is subject to change without notice. Pico Digital and the Pico Digital logo are trademarks of Pico Digital Inc. Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.



SPECIFICATIONS

AUDIO/VIDEO INPUTS Per Encoder Module

HDMI	Dual Type A v1.4 (Clear)
Component	Dual YPrPb, (RCA)
Audio	Dual Stereo (RCA)
Composite/Closed Caption	Dual CVBS (RCA)

VIDEO FORMATS

In/Out Line Rates	1080p/1080i/720p/480p/576i/480i
Frame Rates	25/29.97/30/50/59.94/60

VIDEO/AUDIO COMPRESSION

Video Codecs	HD and SD MPEG-2/H.264
Audio Codecs	Layer II, Dolby® Digital Stereo Creator

QAM/RF OUTPUT

Frequency Range	50 to 1002 MHz
RF Channel count	4
Modulation Modes	QAM 64/256
QAM Type	Annex A/B
MER	> 40 dB
RF Level (pre-combined)	>60 dBmV
RF Level Adjustment Range (combined)	38 to 53 dBmV
Spurious	> 60 dBc
I/Q Amplitude Imbalance	< 1%
I/Q Phase Error	< 1°
Frequency Accuracy	± 100 Hertz
Phase Noise	100 dBc @ 10Khz offset
Amplitude flatness	± 0.25 dB (over 24 MHz bandwidth)
Output Connector	F-Female, 75Ω
Front Panel Test Port	F-Female, 75Ω

IP OUTPUT (optional)

Connection	RJ45, GbE, Full Duplex, Auto-Neg
Addressing	Unicast, Multicast
Transport Protocol	UDP/IP
Transport Format	SPTS

MANAGEMENT

Connection	RJ-45, GbE, Full Duplex, Auto-Neg
Protocols	HTTP
User Interface	Web Browser
Browser Support	IE9 or later, Firefox and Chrome

EAS INPUTS

Video	CVBS (RCA)
Audio	Stereo (RCA)
Trigger	Terminals

INTERNAL AC POWER SUPPLY

Line Voltage	93-254 VAC, 47-63 Hz
Power Consumption	up to 130 Watts

EXTERNAL DC POWER BACKUP

Voltage	+12 VDC ±5 % VAC
Current	< 10 Amps
Operating Temperature	0- 50° C

GENERAL

Dimensions	1RU, 19" (W)
------------	--------------

ORDERING INFORMATION

PD1000	Universal Digital Platform Chassis
EM-2HD	MPEG-2 or H.264 Dual HD Encoder Module for PD1000 (cables included)
EM-2HD/D	EM-2HD includes Dolby Digital Stereo Creator
EM-2HD-WMR	EM-2HD with watermarking option – available 2014

OM4	QAM Output Module for PD1000
OM4-IP	IP Output Option for OM4
OM2	OFDM Output Module for PD1000 – available 2014
EM-HDSDI	HDSDI Input – available 2014

CONFIDENTIAL

NOTE: Up to 4 dual encoder modules (EM-2HD) and 1 output module (OM4) per (PD1000) Platform
 Copyright © 2013 Pico Digital Inc. All right reserved. Information in this document is subject to change without notice. Pico Digital and the Pico Digital logo are trademarks of Pico Digital Inc.
 Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.