


T1160-FE BLACK

SERIES 11 COAXIAL CABLE



Series 11 Coaxial Cable
 Copper Clad Steel Conductor
 Foamed Polyethylene Dielectric
 Bonded APA Laminate Shield
 60% Aluminum Braid
 Underground Floodant
 Black Polyethylene Jacket

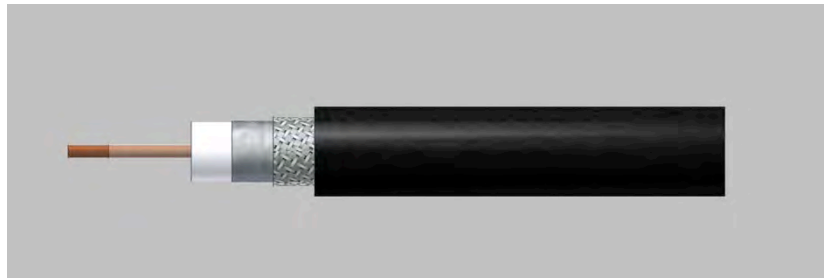

Cable Ordering Information

Part Number	Description	NEC / CSA Listing
011S60E00BK0610000R1	T1160-FE BLACK	none

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Steel	0.0641	1.63
Dielectric	Foamed Polyethylene	0.280	7.11
1 st Outer Conductor	Sealed APA Tape	0.288	7.32
2 nd Outer Conductor	60% Aluminum Braid	0.312	7.92
3 rd Outer Conductor	---	---	---
4 th Outer Conductor	---	---	---
Floodant	Underground	---	---
Jacket	Polyethylene, Black	0.400	10.2
Twisted Pairs	---	---	---
Messenger	---	---	---

Mechanical Specifications

Minimum Bend Radius, in. (mm)		1.50	(38.10)
Product Weight	(less reel)	49 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

All Rights Reserved,
 Specifications subject to change without notice



TFC Coaxial Cable Product Information Sheet

Type: T1160-FE BLACK

Electrical Specifications		
Impedance, Ω	75 \pm 3	
Velocity of Propagation, %	85	
Capacitance, Nominal	16.2 pF/ft	53.2 pF/m
DC Resistance	Ω / kft	Ω / km
Inner Conductor	12.3	40
Outer Conductor	7.10	23
Loop	19.4	63

Notes:

Attenuation, Maximum @ 68 °F (20 °C)		
Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.38	1.25
55	0.96	3.15
211	1.90	6.23
250	2.05	6.73
270	2.13	6.99
300	2.25	7.38
330	2.35	7.71
350	2.42	7.94
400	2.60	8.53
450	2.75	9.02
500	2.90	9.51
550	3.04	9.97
600	3.18	10.43
750	3.65	11.98
870	4.06	13.32
1000	4.35	14.27

All Rights Reserved,
 Specifications subject to change without notice

