


HDE-1C-QAM

SINGLE CHANNEL HD ENCODER, 1xCOMPONENT/COMPOSITE TO 1xQAM

HDE-1C-QAM (MPEG-2 HD Encoder – 1xComponent/Composite – 1xQAM) accepts one (1) high-definition (HD) program from a component input or (1) standard definition (SD) from a composite video input. MPEG-2 encoded outputs are available in QAM (1x) format. The QAM RF output is frequency agile over the entire CATV frequency range of 5-1002 MHz (channels T7-T14, 2-158) with an output level of +40 dBmV. The encoder also has a Delayed Audio output feature to provide proper lip-syncing when external audio amplifiers are used in the system.

The encoder supports Dolby® Digital audio encoding and Closed Captioning (EIA-608). Comprehensive remote monitoring and control is accomplished using any standard Web browser via a front-panel 100/1000 Ethernet connection.

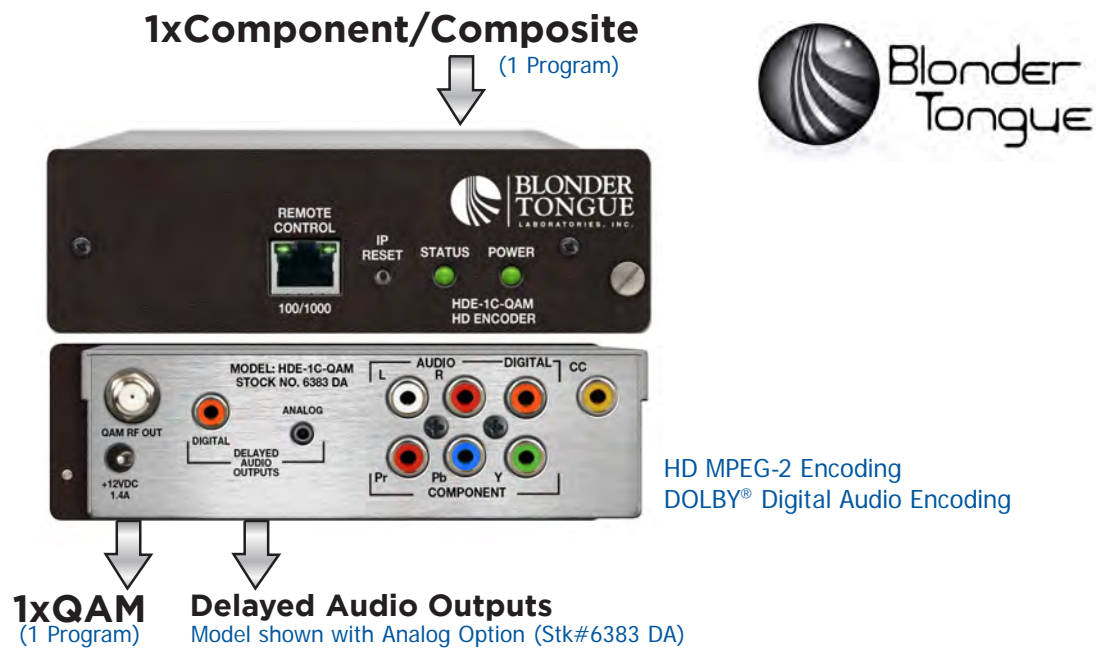

HD MPEG-2 Encoding
DOLBY® Digital Audio Encoding

Features

- Accepts one (1) program from any of the following inputs: 1xComponent or 1xComposite
- Delivers the following outputs: 1xQAM
- Provides +40 dBmV QAM RF output level
- Provides comprehensive GUI-based monitoring and control via standard Web browsers
- Compact design permits installation of up to 3 Encoder modules in 1RU
- Supports Real-time Dolby® Digital audio encoding
- Supports user-defined PSIP configuration
- Supports Closed Captioning EIA-608
- Full QAM output channel coverage from 5 to 1002 MHz (T7 to 158)
- Delayed Digital Audio Output feature for external audio applications
- Optional Analog Delayed Audio Output for public address system interface

Ordering Information

Model	Stock #	Description
HDE-1C-QAM	6383	MPEG-2 HD Encoder; 1xComponent/Composite inputs; 1xQAM output
	6383 DA	MPEG-2 HD Encoder with Delayed Analog Audio Output
HDE-3MCH	6389	1RU Rack mount chassis; holds 3 HDE-1C-QAM modules

Dolby® is a registered trademark of Dolby Laboratories.

Specifications

Input

Component	Connectors: 3x RCA for Video (Y, Pb, Pr) Video Resolution: 480i, 720p, & 1080i Video Aspect Ratio: 4:3 & 16:9 Audio: 2x RCA for Analog Audio (L, R) 1x RCA for Digital Audio (PCM)
Composite	Connectors: 1x RCA for Video (Y) Video Resolution: 480i Audio: 2x RCA for Analog Audio (L, R) 1x RCA for Digital Audio (PCM)

Encoding Profile	
Video	Output Format: MPEG-2 HD MP@ML; ISO 13818-2 Chroma: 4:2:0 Resolution: 480i, 720p, & 1080i Frame rate: 29.97 fps (480i); 29.97 fps (1080i); 59.97 fps (720p) Aspect Ratio: 4:3 & 16:9 GOP Structure: I & P frames (user-selectable) Transport Rate: Variable (user-selectable) Video Bit Rate: Variable (user-selectable) Video Pre-filter: Variable (user-selectable) Color Space: YCbCr and RGB
Audio	Output Format: Dolby® Digital Sampling rate: 48 kHz Bit rate: Variable; 96 - 448 Kbps (user-selectable)
Closed Captioning	Component: EIA- 608; 1x RCA (CC) Composite: EIA- 608

Alarms/Monitoring/Control

Local Monitoring:	1x Power LED 1x Status LED
Local Control:	1x IP Reset button
Remote Monitoring/Control:	GUI-based menu via Web browser (1x RJ45 connector; 100/1000)

Related Products

Model	Description
HDE-8C-QAM	8xComponent + 8xComposite + 1xSpare inputs; 4xQAM + 1xASI outputs; EAS compatible
HDE-CHV-QAM	MPEG-2 HD Encoder; 1xComponent/HDMI/VGA/Composite inputs; 1xQAM + 1xASI + 1xIP outputs
HDE-CSV-QAM	MPEG-2 HD Encoder; 1xComponent/HD-SDI/HDMI/VGA/Composite inputs; 1xQAM + 1xASI + 1xIP outputs

©2015 Blonder Tongue Laboratories, Inc. All Rights Reserved. Specifications subject to change without notice. All trademarks are property of their respective owners.

Output

QAM	Connector: 1x "F" Female (Rear-panel) Modulation: QAM 16, 32, 64, 128, and 256 Standards: ITU-T J.83; Annex A and B DVB Symbol Rate: Variable; up to 7 MSymbol/sec (MBaud) Frequency Range: 5 to 1002 MHz Tuning: CATV Channel Selectable (Ch. T7-T14, 2 to 158) Channels' Bandwidth: 6 MHz RF Level: +40 dBmV ±1 dB RF Level Adjustment: +35 to +42 dBmV, 0.5 dB increment Frequency Tolerance: ± 0.5 kHz @ 77 °F (25 °C) Frequency Stability: ± 5 kHz over 32 to 122 °F (0 to 50 °C) Amplitude Flatness: ± 0.25 dB (over 6 MHz channel) Phase Noise: -98 dBc (@ 10 kHz) Spurious: -60 dBc Broadband Noise: -70 dBc (@ +40 dBmV output level, 5.5 MHz bandwidth) Impedance: 75 Ω Spectral Inversion: Auto Recognition Carrier Suppression: 45 dB Return Loss: 14 dB typical Signal-to-Noise Ratio (SNR): 40 dB typical MER: 40 dB typical I/Q Phase Error: Less than 1 degree I/Q Amplitude Imbalance: Less than 1%
------------	---

Delayed Audio Output	(Applicable only when using L/R Audio Inputs)
Digital	Connector: 1x RCA Delay: 0-2000 msec, 32 msec increments
Analog Option (#6383 DA)	Connectors: 1x 3.5mm Stereo Jack Delay: 0-2000 msec, 32 msec increments

General

Dimensions (W x D x H):	5.65 x 12.5 x 1.75 inches (144 x 317.5 x 44.5 mm)
Power:	External Power Supply (Input 115-230VAC / Output 12VDC @ 3 Amp)
Power Dissipation:	17 W
Weight (one module):	1.5 lbs (0.7 kg)
Operating Temperature:	32 to 122 °F (0 to 50 °C)
Storage Temperature:	-13 to 158 °F (-25 to 70 °C)
Operating Humidity:	0 to 95% RH @ 35 °C max, non-condensing
Storage Humidity:	0 to 95% RH @ 35 °C max, non-condensing