



Colors



Pod

Silver

PowerPod™

Silver




SuperPod™



Silver


Size and Weight

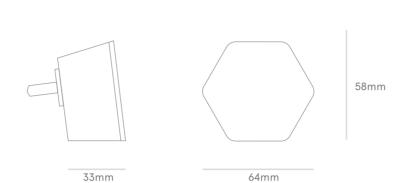

64mm W x 58mm H x 33mm D Not including plug

92g

Weight

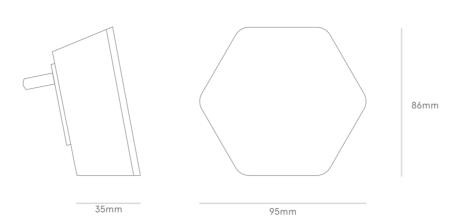


95mm W x 86mm H x 35mm D

Not including plug

Weight

192g

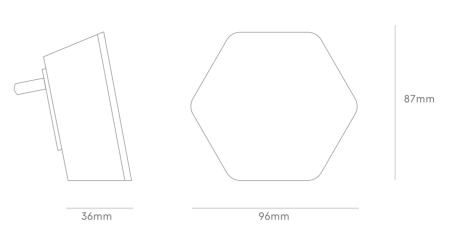

96mm W x 87mm H x 40mm D Not including plug

Weight

217g

Wi-Fi and Ethernet Interlaces

Wi-Fi Interfaces

2x2 MIMO 802.11a/n/ac 5GHz 2x2 MIMO 802.11b/g/n 2.4GHz Dual-band, dual-concurrent radio operation

Channel Bandwidth

5GHz 20/40/80 MHz 2.4GHz 20/40 MHz

Channels 5GHz

36 to 48, 149 to 161 2.4GHz 1 to 13

DFS Channels

52 to 64, 100 to 144 Region Dependent

Ethernet

100/1000Base-T Ethernet with autosense WAN or LAN configuration

IoT Radios

Bluetooth Low Energy

Wi-Fi Interfaces

4x4 MIMO 802.11a/n/ac 5GHz 2x2 MIMO 802.11b/g/n 2.4GHz Dual-band, dual-concurrent radio operation 5GHz MU-MIMO with Beamforming

Channel Bandwidth

5GHz 20/40/80 MHz 2.4GHz 20/40 MHz

Channels

5GHz 36 to 48, 149 to 161 2.4GHz 1 to 13

DFS Channels

52 to 64, 100 to 144 Region Dependent

Ethernet

100/1000Base-T Ethernet with autosense WAN or LAN configuration

IoT Radios

Bluetooth Low Energy

Wi-Fi Interfaces

4x4 MIMO 802.11a/n/ac 5GHz 2x2 MIMO 802.11a/n/ac 5GHz 2x2 MIMO 802.11b/g/n 2.4GHz Tri-band, tri-concurrent radio operation

5GHz MU-MIMO with Beamforming

Channel Bandwidth

5GHz 20/40/80 MHz 2.4GHz 20/40 MHz

Channels

5GHz 36 to 48, 149 to 161 2.4GHz 1 to 13

DFS Channels

52 to 64, 100 to 144 Region Dependent

Ethernet

Dual 100/1000Base-T Ethernet with autosense WAN or LAN configuration

IoT Radios

Bluetooth Low Energy

Power

Power Supply

100 to 240VAC, 50 to 60Hz

Power Consumption 2W Standby

4W Average **7W Maximum** Plug Type

Type A (NA and Japan) Type C (EU) Type G (UK)

Power Supply

100 to 240VAC, 50 to 60Hz

Power Consumption

7W Average 10W Maximum

Plug Type

Type A (NA and Japan) Type C (EU) Type G (UK)

Power Supply

100 to 240VAC, 50 to 60Hz

Power Consumption

4.5W Standby 10W Average 15W Maximum

Plug Type

Type A (NA and Japan) Type C/E/F (EU) Type G (UK)

Environment

Operating Temperature

0°C to 35°C

Operating Relative Humidity

10% to 90%

Storage Conditions

-20°C to 70°C 10% to 90% (Relative Humidity)

Operating Temperature 0°C to 40°C

Operating Relative Humidity

10% to 90%

Storage Conditions -20°C to 70°C

10% to 90% (Relative Humidity)

Operating Temperature

0°C to 40°C

Operating Relative Humidity

10% to 90%

Storage Conditions -20°C to 70°C

10% to 90% (Relative Humidity)

Networking and Connectivity

Networking Modes

Auto-sensing Router or Bridge mode

Firewall and Networking

NAT, DHCP server, UPnP, client IP reservation, port forwarding

Managed 2.4 GHz and 5 GHz

single SSID

Home SSIDs

Guest Access HomePass® single network SSID with multiple unique passwords

Networking Modes

Auto-sensing Router or Bridge mode

NAT, DHCP server, UPnP, client

Firewall and Networking

IP reservation, port fowarding **Home SSIDs**

Managed 2.4 GHz and 5 GHz single SSID

Guest Access HomePass® single network SSID with multiple unique passwords

Networking Modes

Auto-sensing Router or Bridge mode

Firewall and Networking

NAT, DHCP server, UPnP, client IP reservation, port fowarding

Managed 2.4 GHz and 5 GHz

Home SSIDs

single SSID **Guest Access** HomePass® single network SSID

with multiple unique passwords

Security

Authentication

WPA2-PSK (KRACK Patched)

Encryption

AES

Authentication

WPA2-PSK (KRACK Patched)

Encryption

AES

Authentication

WPA2-PSK (KRACK Patched)

Encryption

AES