

Blonder  
Tongue

Data, VoIP, Video Support  
Hospitality & MDUs

# CMTS Edge

Multi-function Edge CMTS and QAM Video Platform



## Product Overview

The **CMTS Edge**, a best-in-class CMTS, supports DOCSIS 3.1, 3.0, and 2.0, using a powerful Marvell Octeon™ network processor with hardware acceleration. The CMTS Edge is built upon a stable and proven Linux operating system to deliver the industry's best performance, scalability, security, and reliability. Compact in a 1RU footprint, the CMTS Edge makes mounting simple and takes up minimal space in a data center. The dual redundant power supplies also provide valuable uptime protection.

- » DOCSIS/EuroDOCSIS 3.1/3.0/2.0 compatible
- » Compact 1RU 19" chassis
- » Hot swap dual redundant power supplies
- » Intuitive web-based GUI
- » Command line interface via serial/SSH/Telnet
- » Integrated cable modem load balancing
- » Real time CM/CPE statistics
- » QoS support
- » Multicast IP video in Edge QAM mode
- » Internal DHCP/TFTP server
- » Support for external provisioning DHCP/TFTP
- » Dual-Stacked IPv4/IPv6 compatibility
- » VLAN tagging via option 60
- » L2/L3 DHCP relay
- » SFP+ 10GbE / Fast-Ethernet / Serial front panel

There are multiple CMTS Edge models, giving you the flexibility to deploy an economical solution today, with the availability to scale your throughput as your bandwidth demands increase.

## Ordering Information

Model	Stock #	Description
CMTS Edge 16	<b>2348 16</b>	16 Down / 4 Up; DOCSIS 3.0/2.0
CMTS Edge 32	<b>2348 32</b>	32 Down / 8 Up; DOCSIS 3.0/2.0
CMTS Edge 32 Plus	<b>2348 32P</b>	32 Down / 1 OFDM Down / 8 ATDMA Up; DOCSIS 3.1/3.0/2.0

ISO 9001:2015 Certified

Rev: 121321

© Blonder Tongue Labs, Inc. All Rights Reserved. Specifications subject to change without notice. All trademarks are property of their respective owners.

# CMTS Edge

Multi-function Edge CMTS and QAM Video Platform

## Specifications

### Input/Output Interfaces

#### Data Ports

Up to 10GbE	1x SFP+ Pluggable (Optical/Copper)
100Mbps	1x RJ45 Fast-Ethernet (Management)

#### RF Upstream

Connectors	4 x "F" Connector
# of Channels	Up to 8 depending on license
Frequency Range	5 - 85 MHz
Modulation Mode	QPSK / 16, 32, 64 or 256 QAM
Bandwidth	1.6 / 3.2 / 6.4 MHz
Receive Levels	-7 to +23 dBmV @ 6.4 MHz -10 to +20 dBmV @ 3.2 MHz -13 to +17 dBmV @ 1.6 MHz

#### RF Downstream

Connectors	1x "F" Connector
# of Channels	Up to 32 SCQAM, 1 OFDM (optional)
Frequency Range	54-1003 MHz
Modulation Scheme	64/256/1024/2048/4096 QAM
Max QAM Output Level (@ 6MHz)	~28 dBmV @ 32 SCQAM & 1 OFDM ~42 dBmV @ 32 channels ~45 dBmV @ 16 channels ~49 dBmV @ 8 channels ~52 dBmV @ 4 channels ~56 dBmV @ 2 channels ~60 dBmV @ 1 channel

### Alarms / Monitoring / Control

Local Monitoring	Power Supply A/B, SFP+ Link, Power, Run, Cable, and Alarm (LED Indicators)
Button	1x IP Reset Button
Control Port	RJ45 - configurable IP address (Front Panel)
Access	HTTP GUI and Telnet/SSH over IP
Console	1 x RJ45 RS232 serial port (Front Panel)

### System Functions

DHCP Internal	IPv4 and IPv6
DHCP External	Supports L2/L3 DHCP/DHCPv6 Relay
IPv4 and IPv6	IPv4 and IPv6 dual-stack
QoS	802.1ad / 802.1q
VLAN	VLAN tagging by device type using option 60
L2VPN	L2VPN support, IGMP v2/v3 snooping
Security	Shared Secret, PKI
Spread Spectrum	Upstream Automatic frequency hopping
Load Balancing	RLBG/GLBG, Load balance priority
Multicast	Static Multicast verification MLD v1 & v2 IGMP v2 & v3

### General

Dimensions (W x H x D)	19.0 x 1.75 x 11.8 in (483 x 45 x 300 mm)
Weight	12 lbs (5.5 kg)
Power	90V-264VAC, 50-60Hz (Dual Redundant)
Power Consumption	64 W
Operating Temp.	32 to 122 °F (0 to 50 °C)
Storage Temp.	-13 to 158 °F (-25 to 70 °C)
Operating Humidity	0 to 95% RH @ 35 °C max, non-condensing

All trademarks are property of their respective owners. Specifications subject to change without notice.


Blonder  
Tongue

Data, VoIP, Video Support  
Hospitality & MDUs

## CMTS Edge

Multi-function Edge CMTS and QAM Video Platform

### Overview

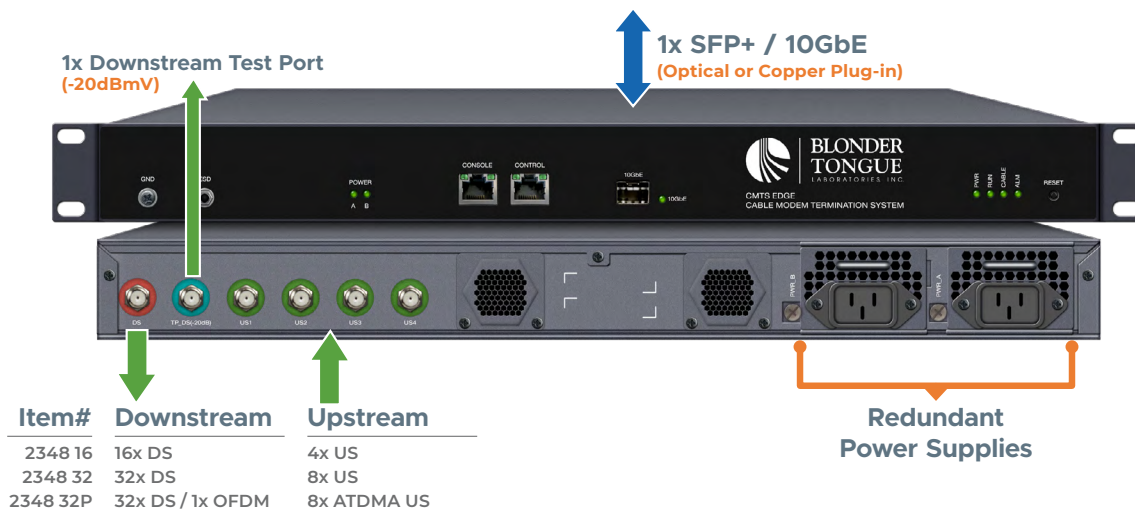

Distribution partner:

### License Information

To provide the ultimate in scalability, software licenses are available to convert the CMTS Edge 16 to the CMTS Edge 32, and another one to convert the 32 to a 32 Plus.

Stock #	Name
2348 32 LIC	CMTS Edge 32 License Upgrade
2348 32P LIC	CMTS Edge 32 Plus License Upgrade

| ISO 9001:2015 Certified |

All trademarks are property of their respective owners. Specifications subject to change without notice.